

PenMount 5126BH Touch screen Control Board

RoHS compliance (SGS test report number: [CS/2005/C0008](#))

PenMount 5126BH USB control board is a touch screen control board designed for USB interface and specific for 4&8-wire touch screens. It is designed with USB interface features with multiple



devices supporting function, it is able to support up to 15 USB devices through PenMount 5126BH board. With the small footprint mechanical size, the controller consists of two controller ICs, PenMount 5100 and PenMount 5600. PenMount 5100 is an 8-bit AVR microcontroller while PenMount 5600 is a Universal Serial Bus microcontroller. There are two connectors on this board, one connector is for 4&8-wire touch screen cable, and another is for 4-pin USB A type cable (optional).

Specifications:

Touch Screen:	For 4-, & 8-wire analog resistive type
Communications:	USB 1.1 Low Speed
Touch Screen Controller:	PenMount 5100 (10-bit A/D converter inside)
Resistance Range:	50~1.3K
Resolution:	2048x2048
USB controller:	PenMount 5600 RISC USB Microcontroller
Size:	60 (L) x 26 (W) x 8.3 (H) mm ; two 3φscrew holes
Portrait:	Support 90° 180° and 270° screen rotation
Diagnostic:	Touch activate indication LED on board
Electro Static Discharge (ESD)	Air Discharge 20KV Contact Discharge 15KV
Storage Temperature Range	-40 ~ 85
Operating Temperature	0 ~ 70
Multi-devices:	Supporting up to 15 USB devices

Salt International Corp.

7F-1, No. 92, Bao-Jhong Road, Shin-Dian City, Taipei 231, Taiwan.R.O.C
Tel: +886 2 2914-6684 Fax: +886 2 2911-5345 Web: www.salt.com.tw


Driver Software

Windows 98/Me, Windows 2000/XP/2003/Vista, Linux (up to kernel 2.6)


Windows CE 4.2/5.0/6.0 (for X86, Armv4, Armv4i platform)

Mechanical Size:

PenMount 5126BH Control Board

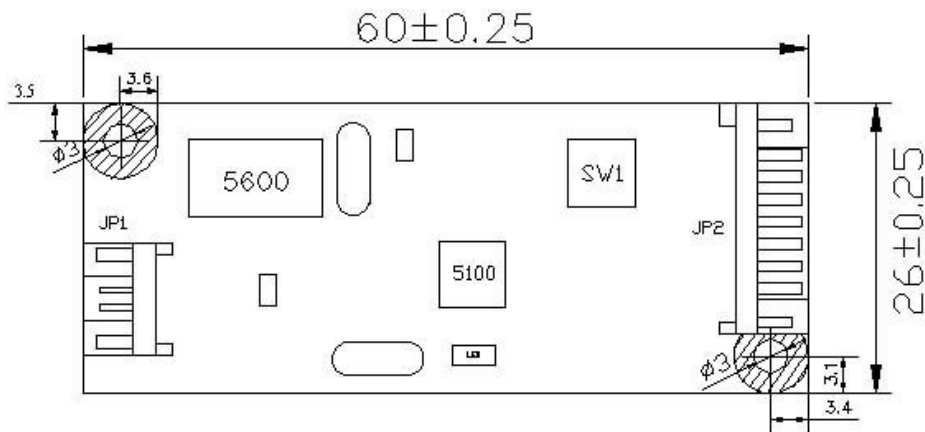

PenMount 5126BH Control Board

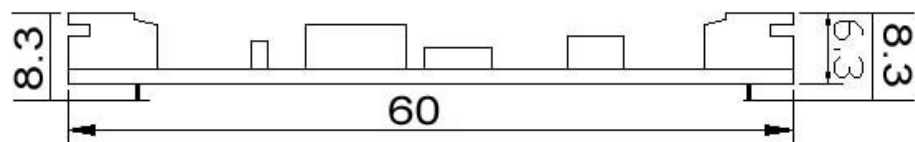

Unit:mm

Connector Definition

JP1: USB Interface:

Pin 1:GND Pin 2:D+ Pin 3:D- Pin 4:VCC

JP2: Touch Screen Lines:

	8-Wire	4-Wire
PIN9	Right Sense	N/A
PIN8	Left Sense	N/A
PIN7	Bottom Sense	N/A
PIN6	Top Sense	N/A
PIN5	Right Excite	Right
PIN4	Left Excite	Left
PIN3	Bottom Excite	Bottom
PIN2	Top Excite	Top
PIN1	Ground	Ground

Salt International Corp.

7F-1, No. 92, Bao-Jhong Road, Shin-Dian City, Taipei 231, Taiwan.R.O.C
Tel:+886 2 2914-6684 Fax: +886 2 2911-5345 Web:www.salt.com.tw